



### Characteristic Curves

#### TSR1-0512SM


Efficiency versus Output Load

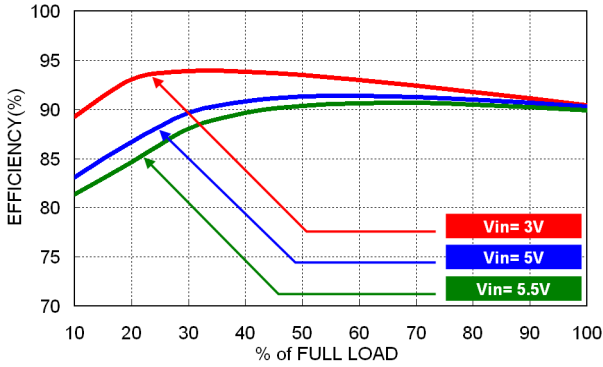


Efficiency versus Input Voltage

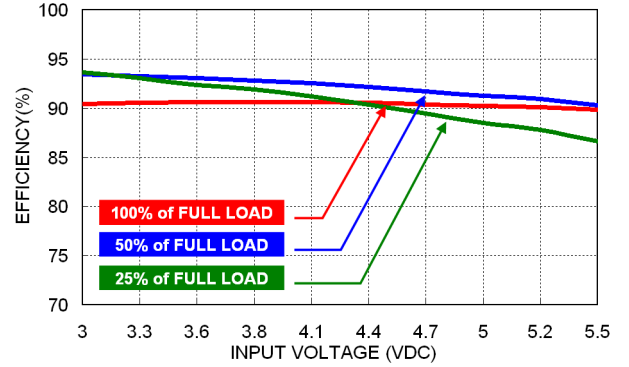


Derating Output Load versus Ambient Temperature

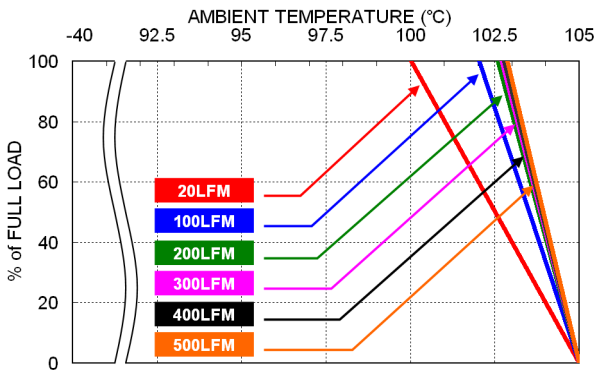


Power Dissipation versus Output Load

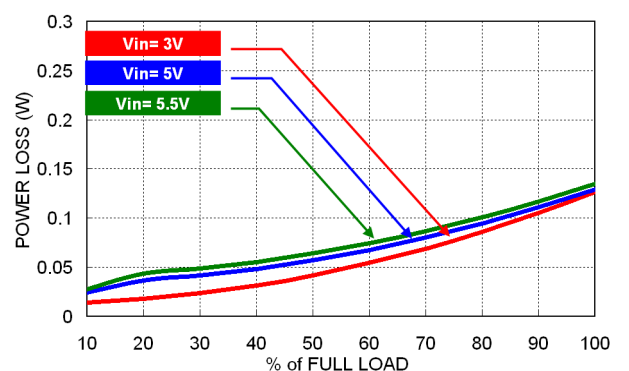


Typical Output Ripple and Noise

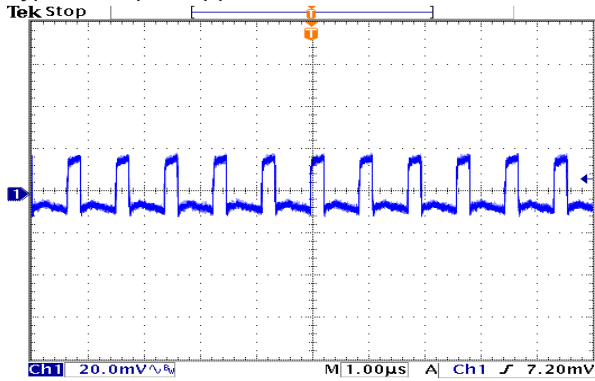

Transient Response to Dynamic Load Change (25%)

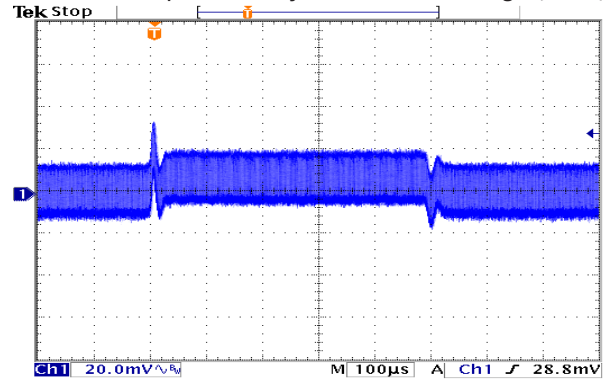


Typical Start-Up and Output Rise Characteristic

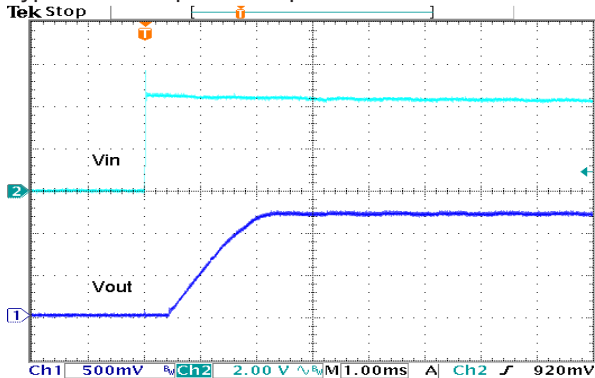


### TSR1-0515SM


Efficiency versus Output Load

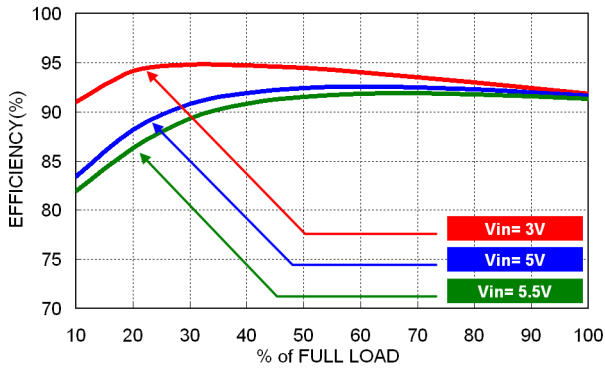


Efficiency versus Input Voltage

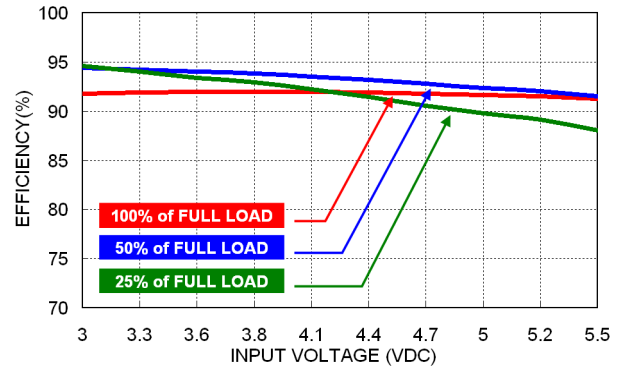


Derating Output Load versus Ambient Temperature

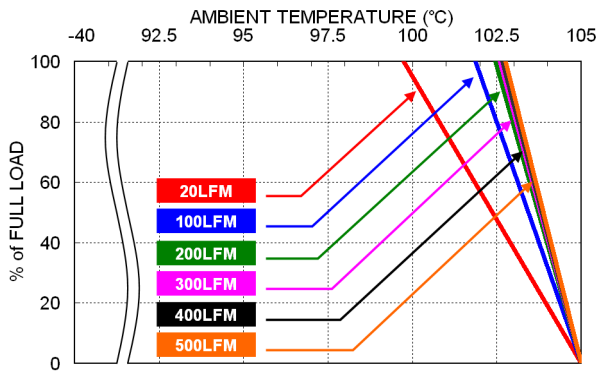


Power Dissipation versus Output Load

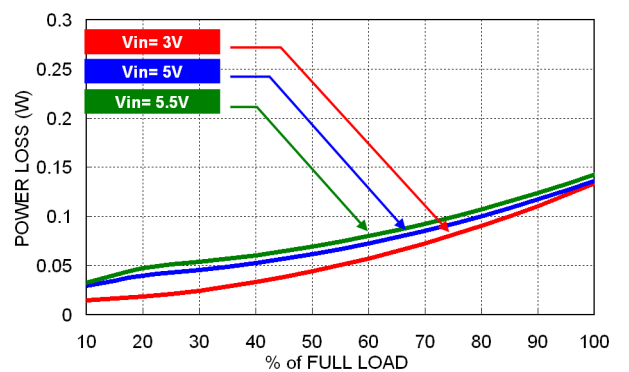


Typical Output Ripple and Noise

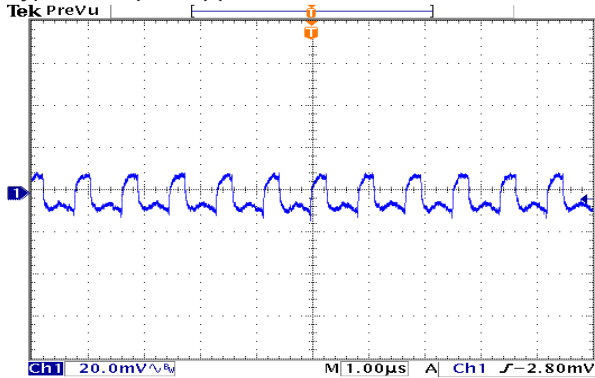

Transient Response to Dynamic Load Change (25%)

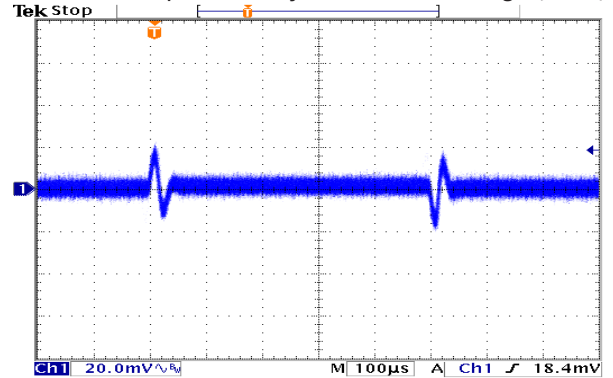


Typical Start-Up and Output Rise Characteristic

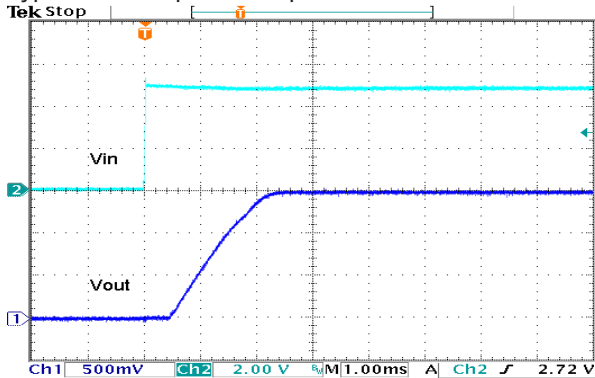


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### TSR1-0518SM


Efficiency versus Output Load

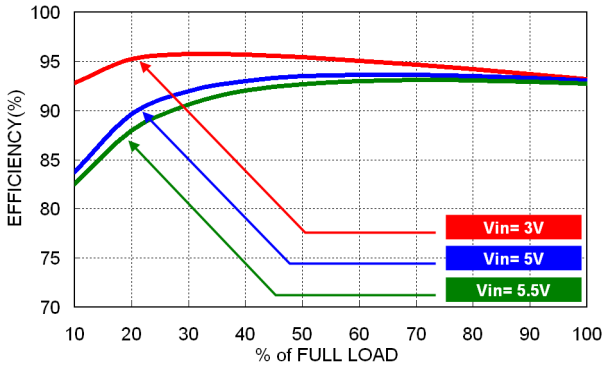


Efficiency versus Input Voltage

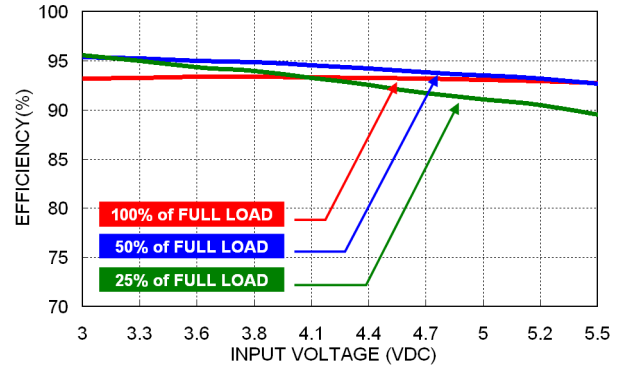


Derating Output Load versus Ambient Temperature

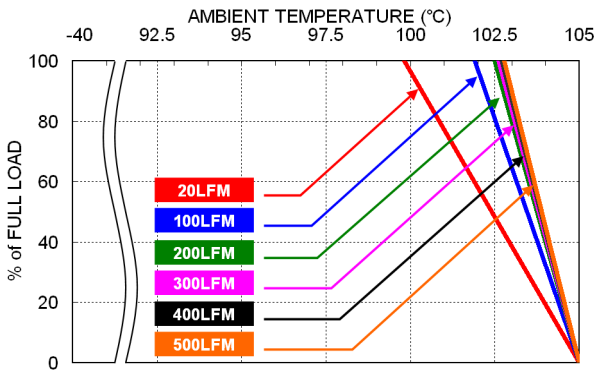


Power Dissipation versus Output Load

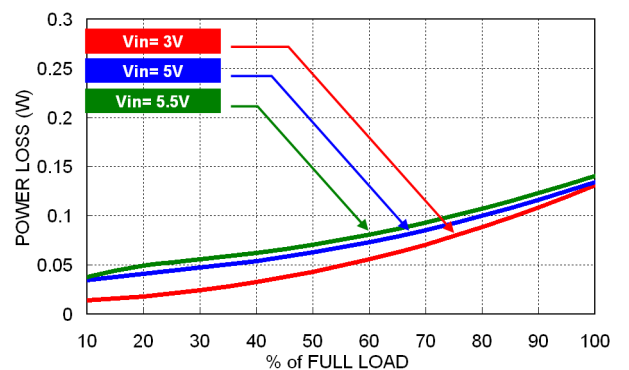


Typical Output Ripple and Noise

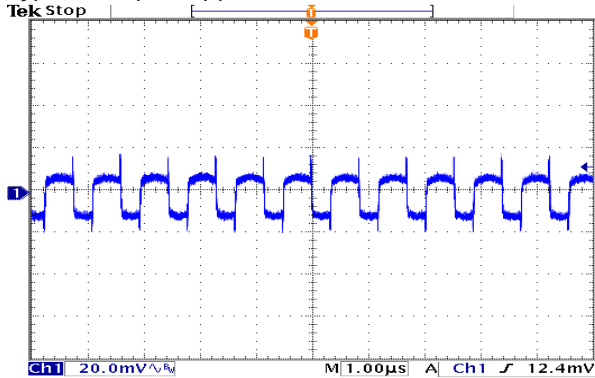

Transient Response to Dynamic Load Change (25%)

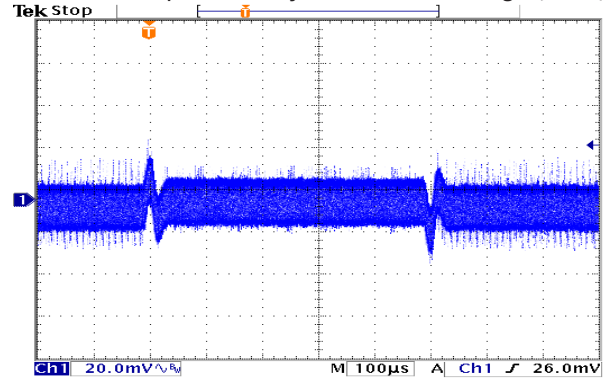


Typical Start-Up and Output Rise Characteristic

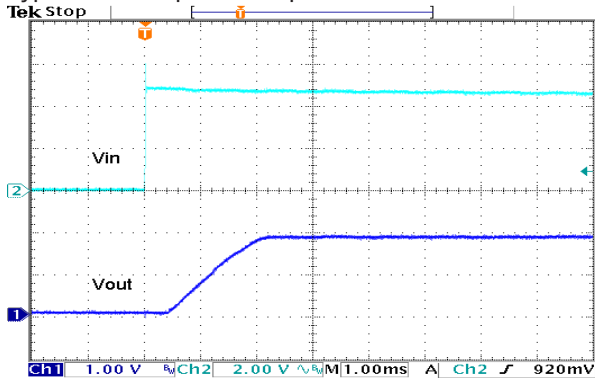


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### TSR1-0525SM


Efficiency versus Output Load

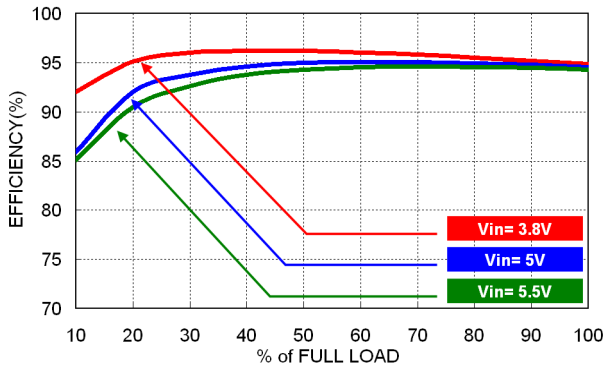


Efficiency versus Input Voltage

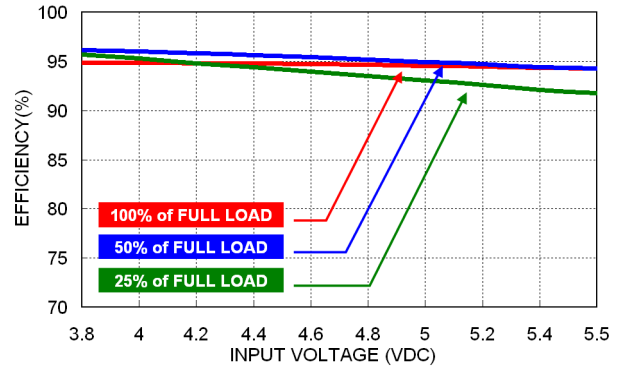


Derating Output Load versus Ambient Temperature

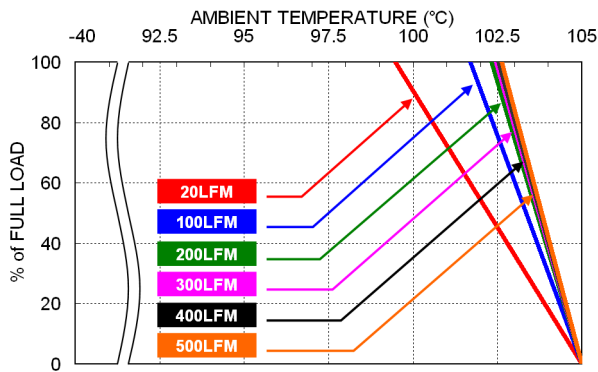


Power Dissipation versus Output Load

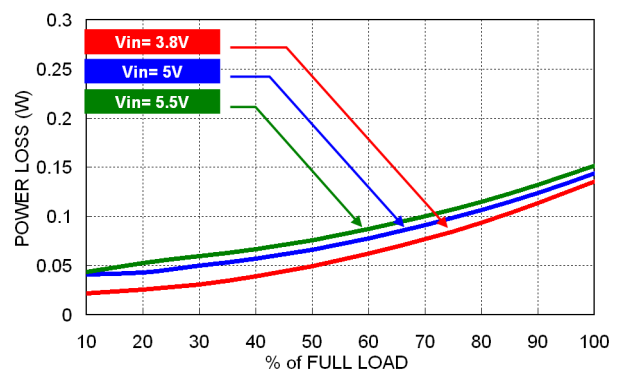


Typical Output Ripple and Noise

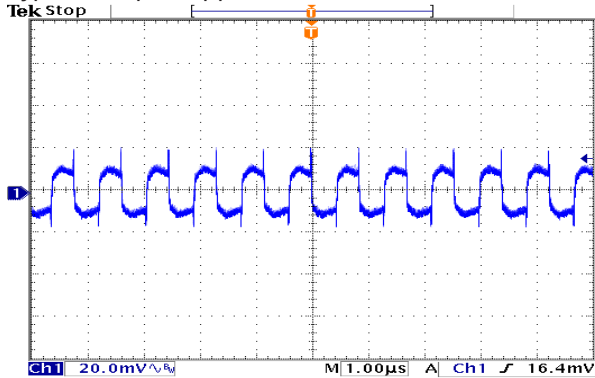

Transient Response to Dynamic Load Change (25%)

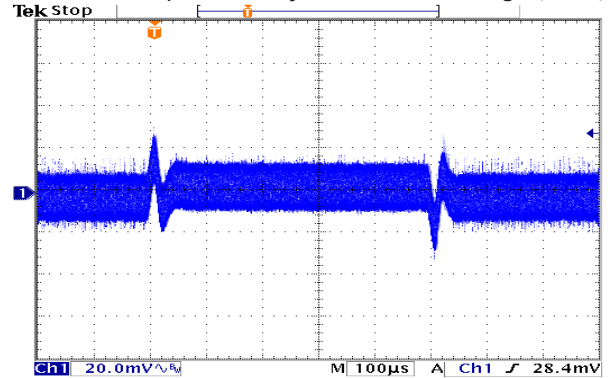


Typical Start-Up and Output Rise Characteristic

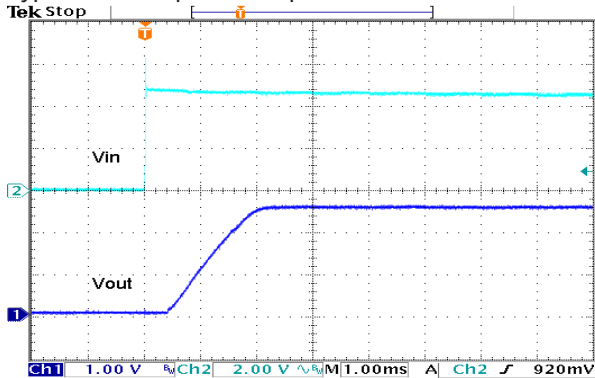


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### TSR1-2412SM


Efficiency versus Output Load

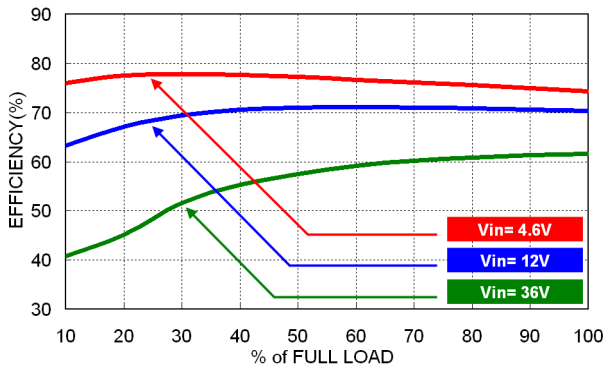


Efficiency versus Input Voltage

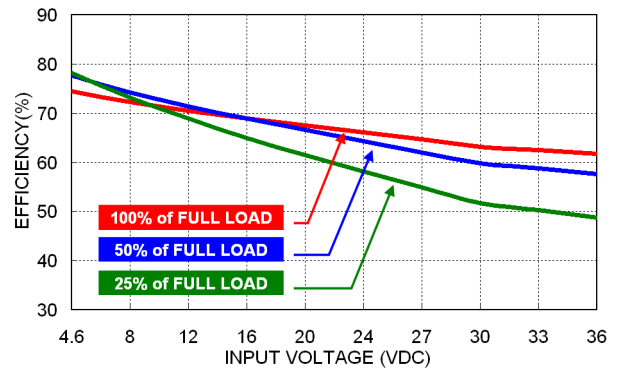


Derating Output Load versus Ambient Temperature

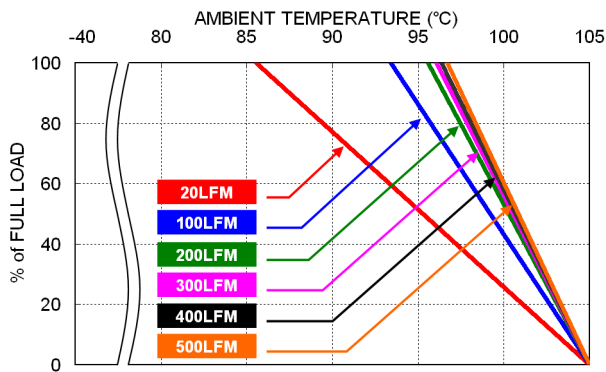


Power Dissipation versus Output Load

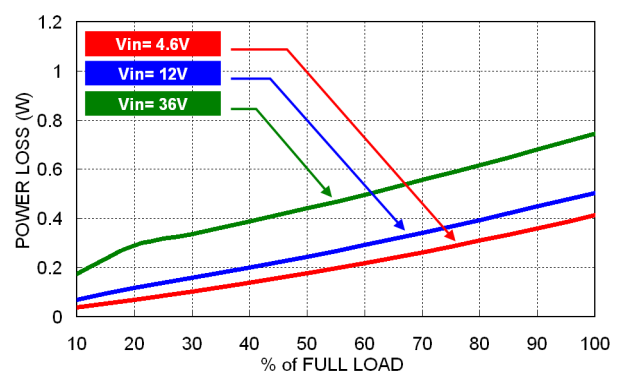


Typical Output Ripple and Noise

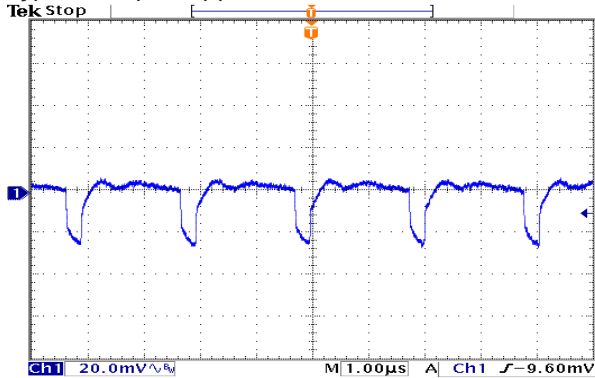

Transient Response to Dynamic Load Change (25%)

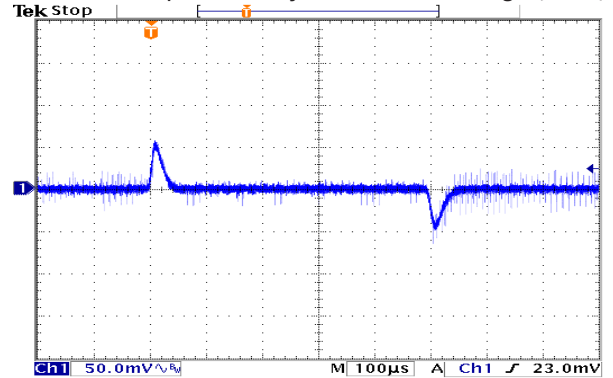


Typical Start-Up and Output Rise Characteristic

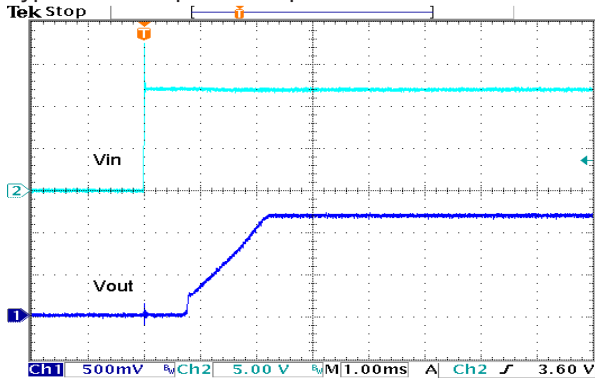


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### TSR1-2415SM


Efficiency versus Output Load

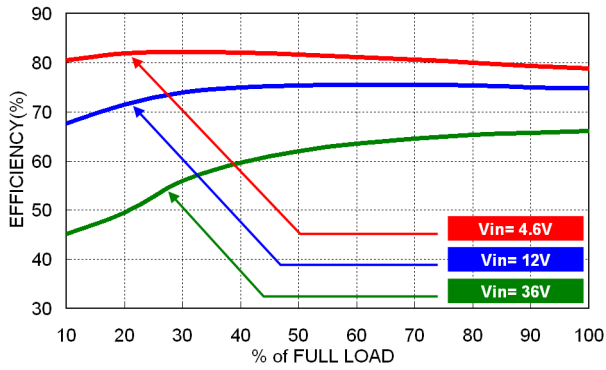


Efficiency versus Input Voltage

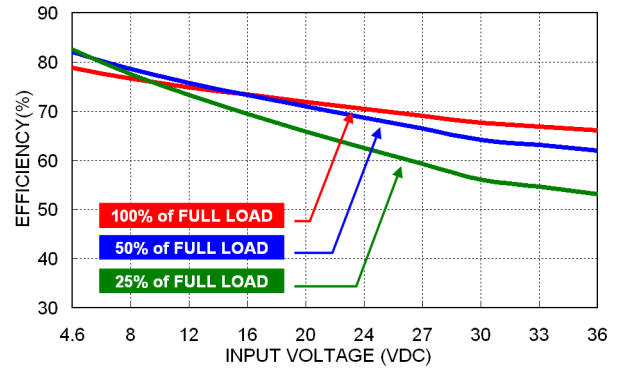


Derating Output Load versus Ambient Temperature

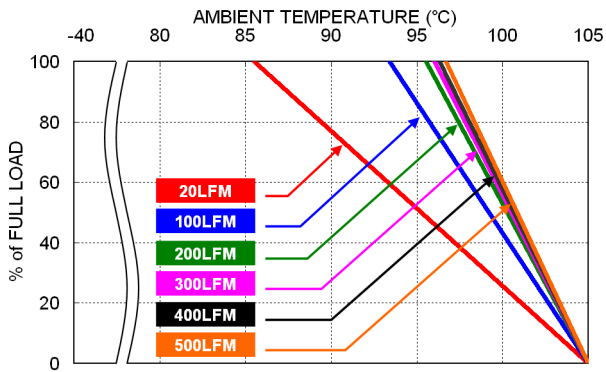


Power Dissipation versus Output Load

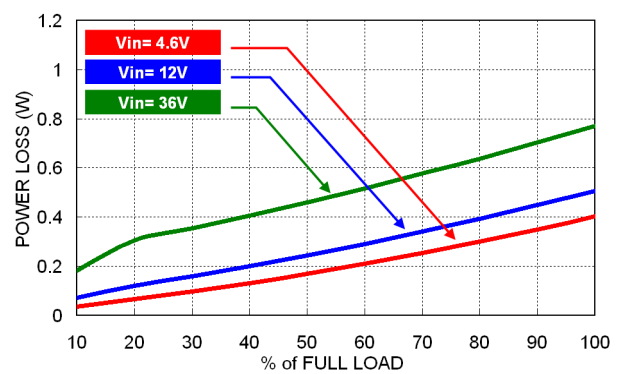


Typical Output Ripple and Noise

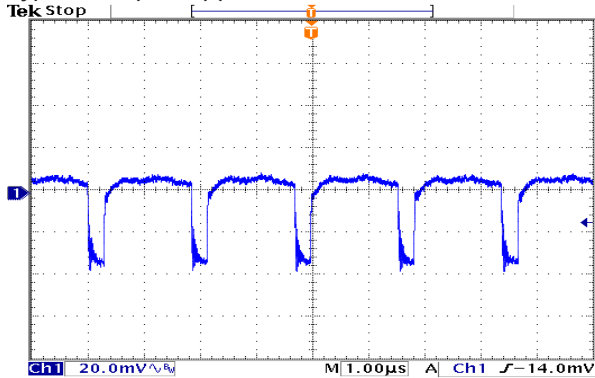

Transient Response to Dynamic Load Change (25%)

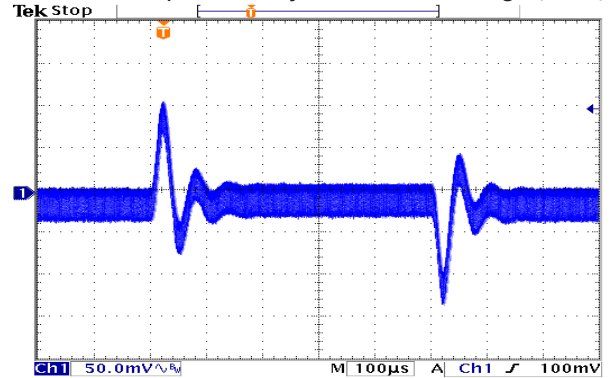


Typical Start-Up and Output Rise Characteristic

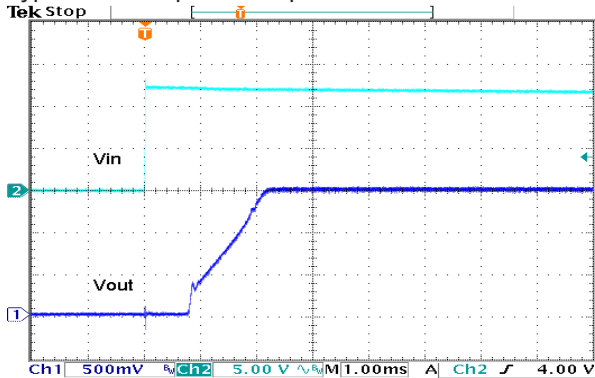


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### TSR1-2418SM


Efficiency versus Output Load

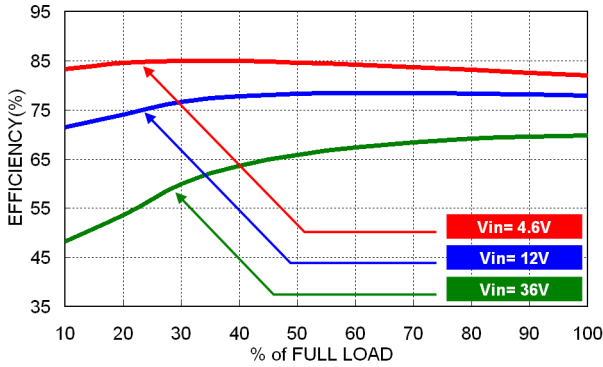


Efficiency versus Input Voltage

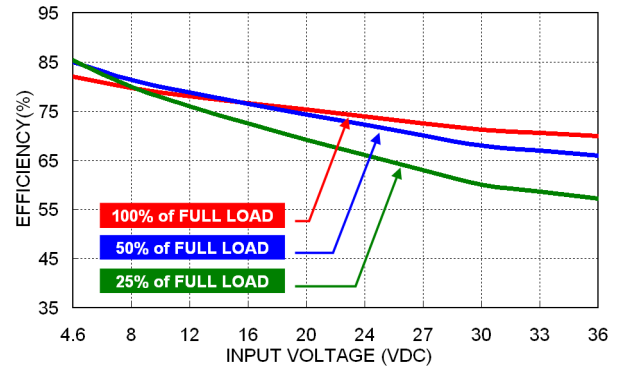


Derating Output Load versus Ambient Temperature

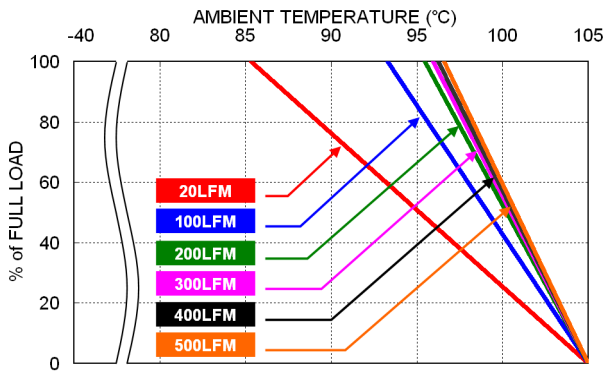


Power Dissipation versus Output Load

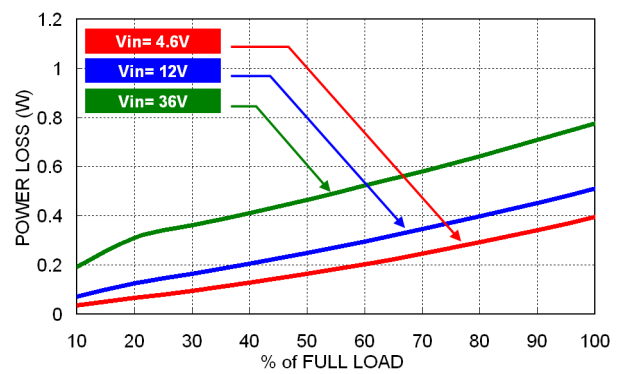


Typical Output Ripple and Noise

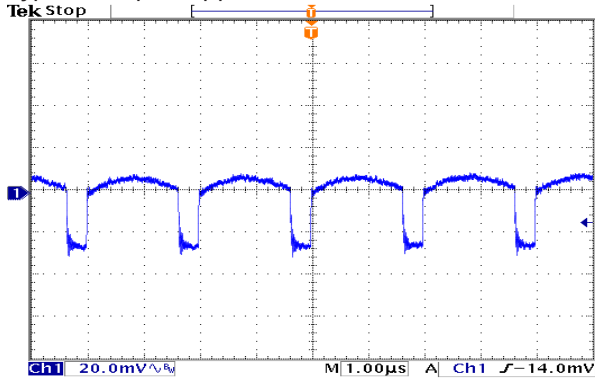

Transient Response to Dynamic Load Change (25%)

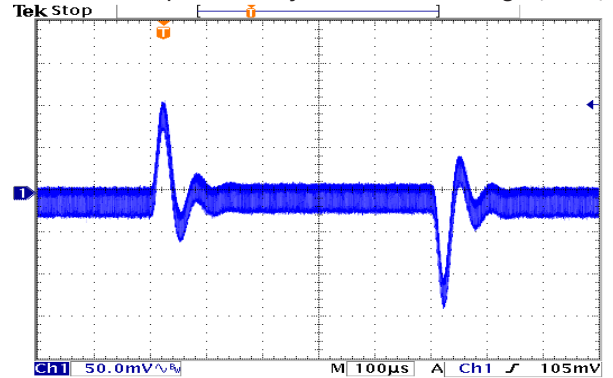


Typical Start-Up and Output Rise Characteristic

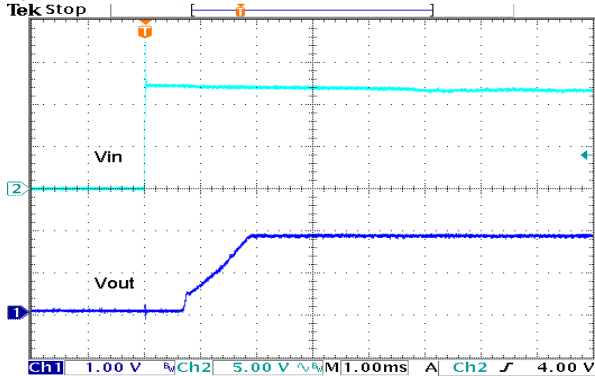


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### TSR1-2425SM


Efficiency versus Output Load

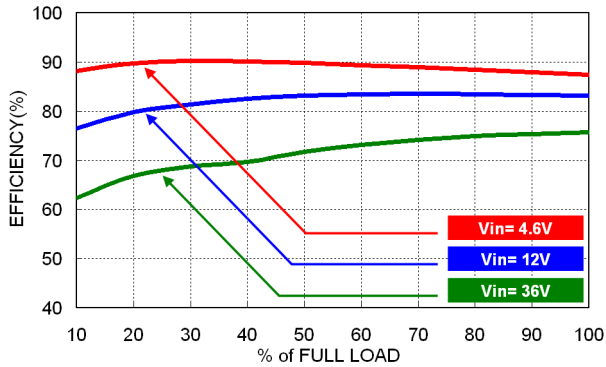


Efficiency versus Input Voltage

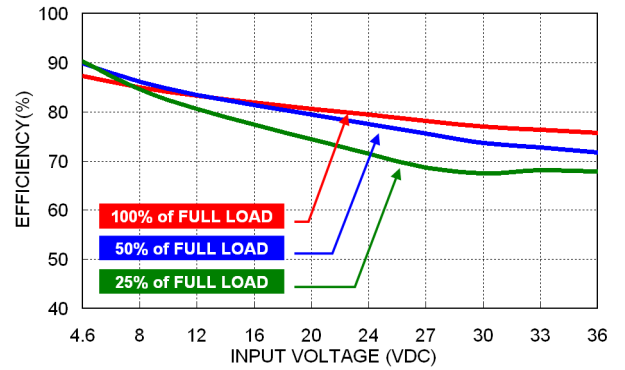


Derating Output Load versus Ambient Temperature

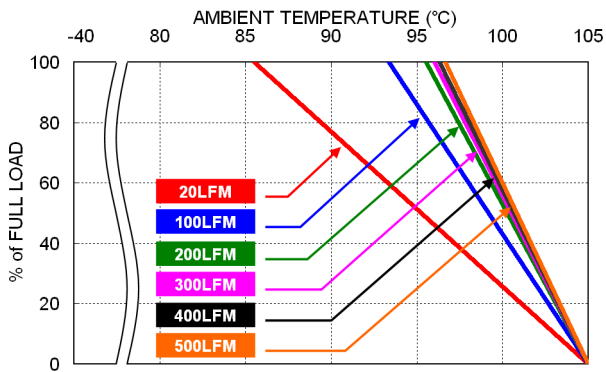


Power Dissipation versus Output Load

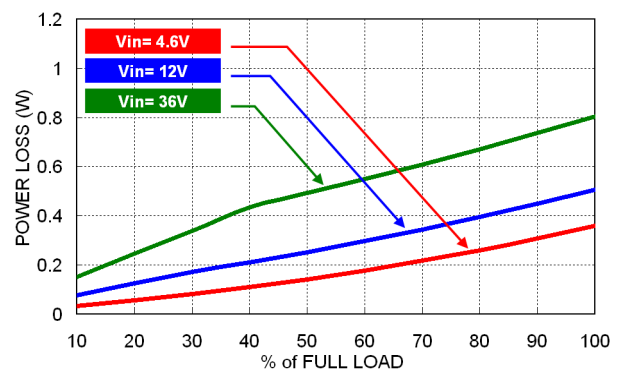


Typical Output Ripple and Noise

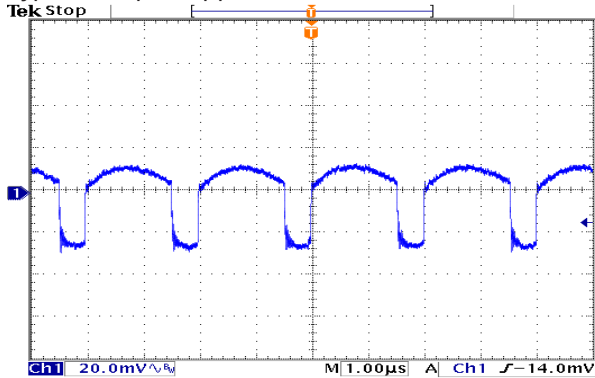

Transient Response to Dynamic Load Change (25%)

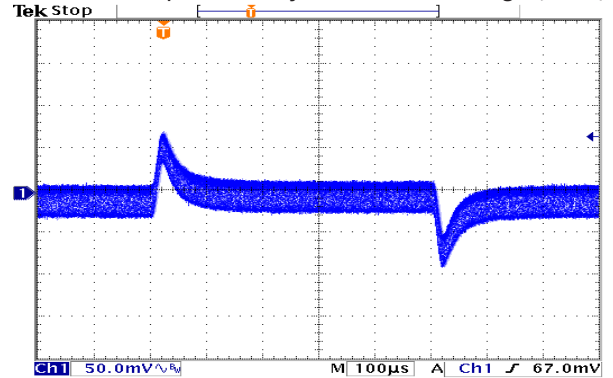

Typical Start-Up and Output Rise Characteristic

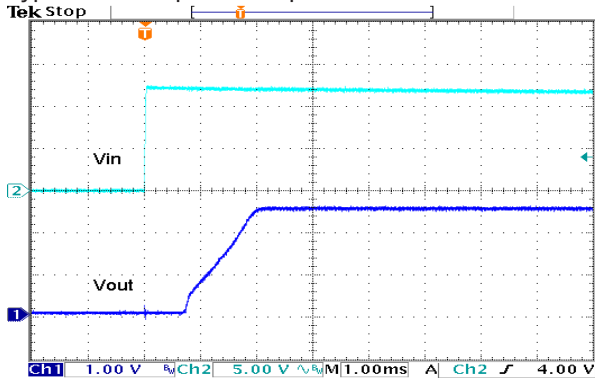


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.




### TSR1-2433SM


Efficiency versus Output Load

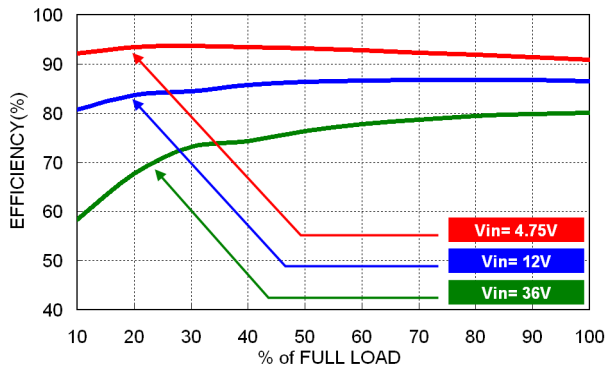


Efficiency versus Input Voltage

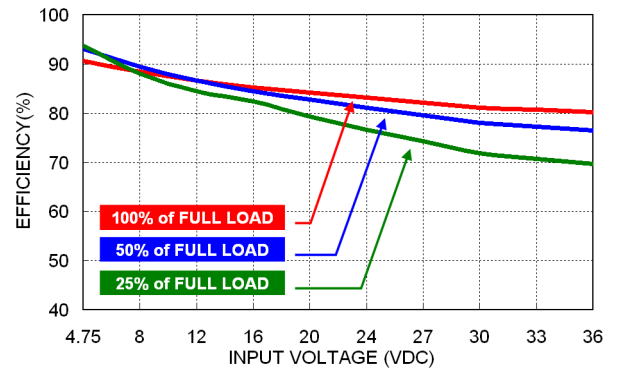


Derating Output Load versus Ambient Temperature

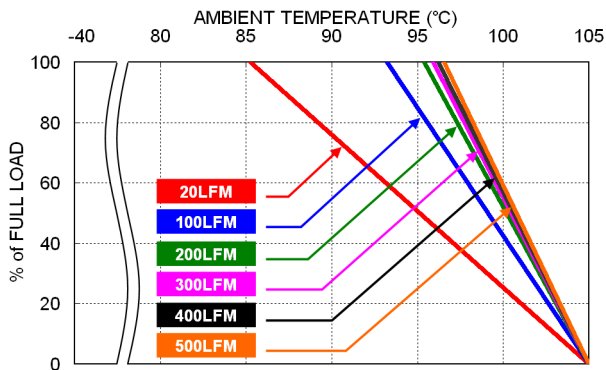


Power Dissipation versus Output Load

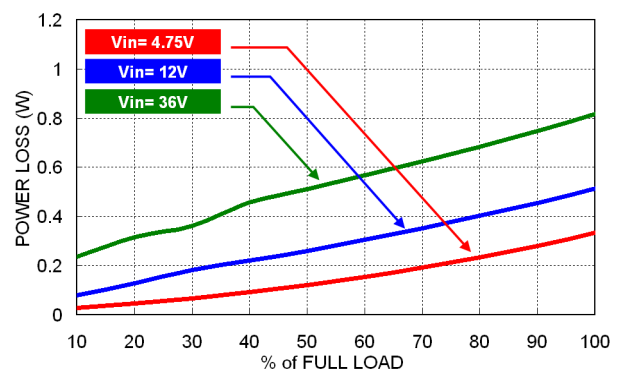


Typical Output Ripple and Noise

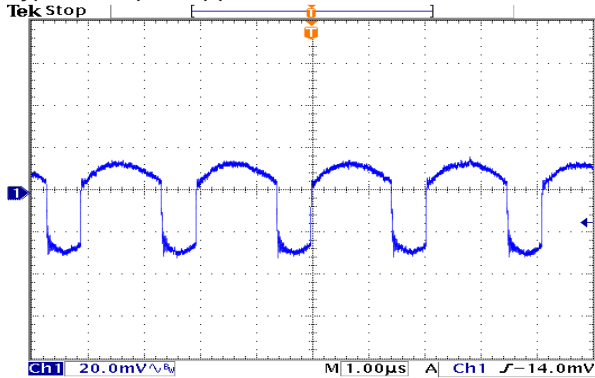

Transient Response to Dynamic Load Change (25%)

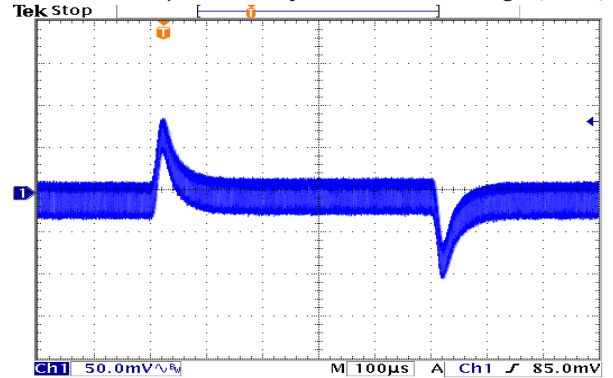


Typical Start-Up and Output Rise Characteristic

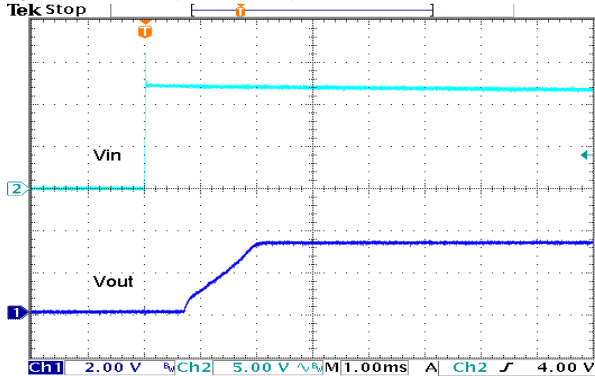


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### TSR1-2450SM


Efficiency versus Output Load

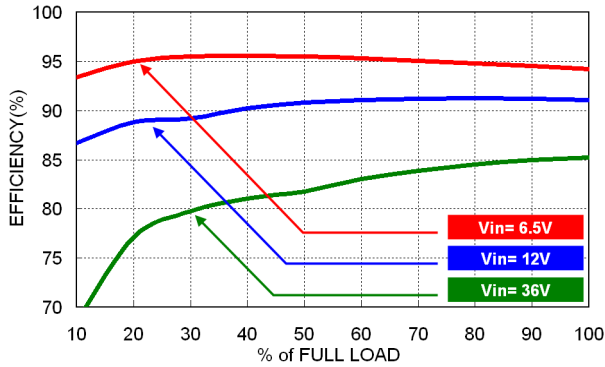


Efficiency versus Input Voltage

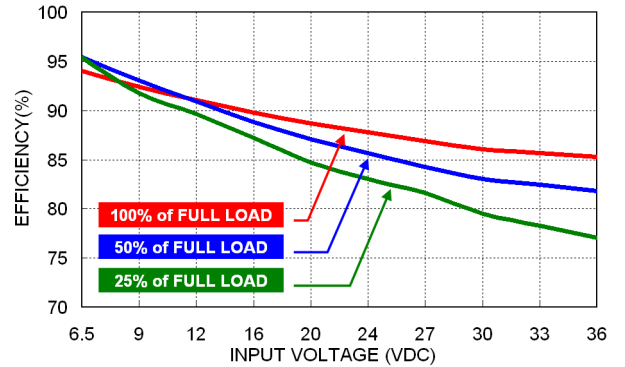


Derating Output Load versus Ambient Temperature

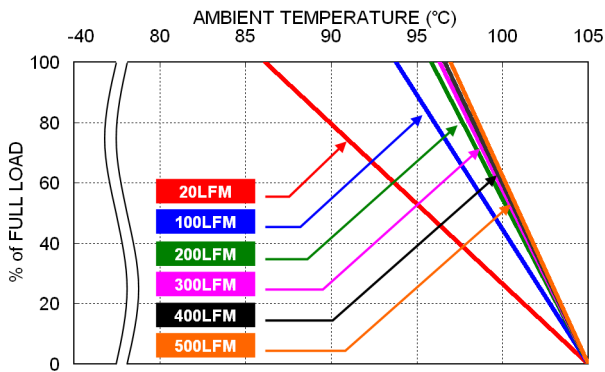


Power Dissipation versus Output Load

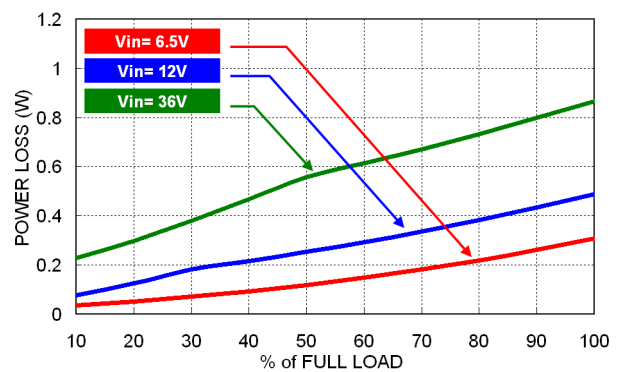


Typical Output Ripple and Noise

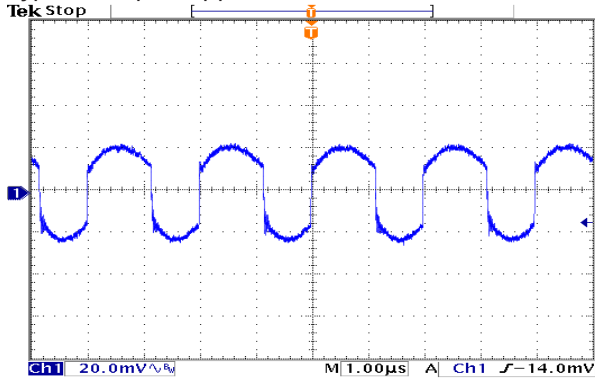

Transient Response to Dynamic Load Change (25%)

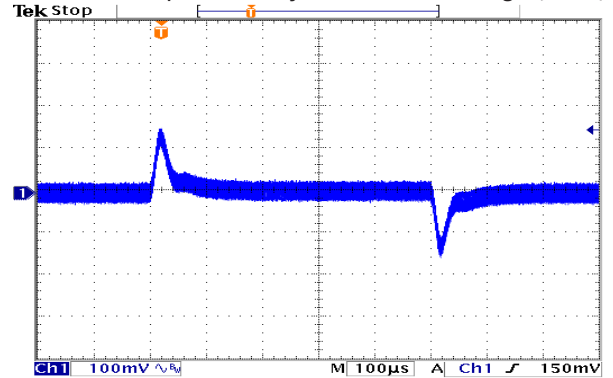


Typical Start-Up and Output Rise Characteristic

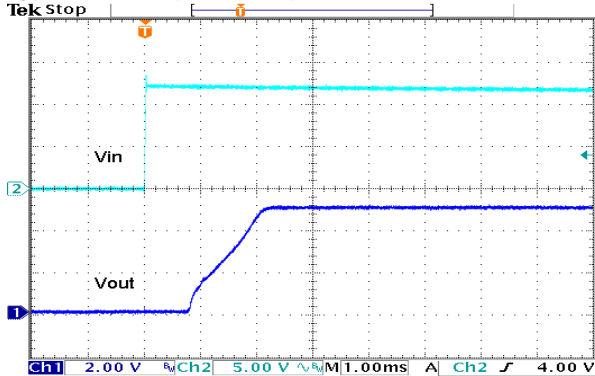


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### TSR1-2465SM


Efficiency versus Output Load

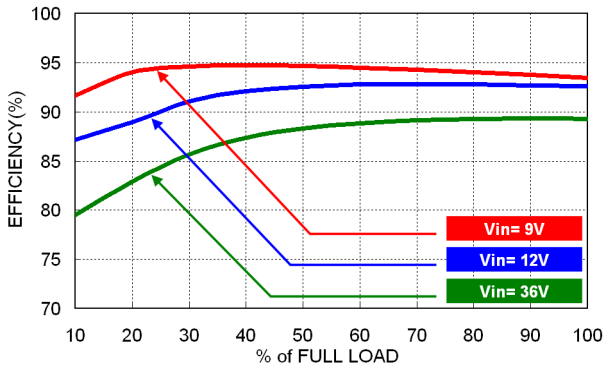


Efficiency versus Input Voltage

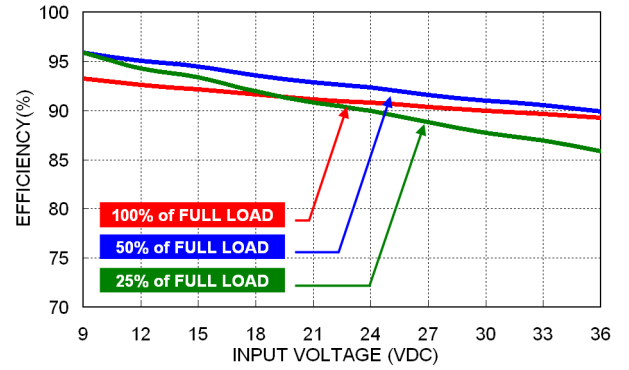


Derating Output Load versus Ambient Temperature

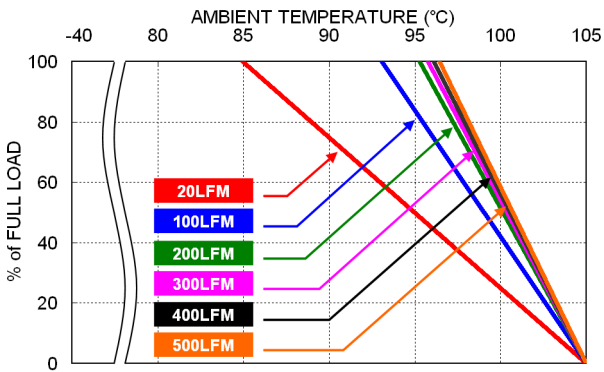


Power Dissipation versus Output Load

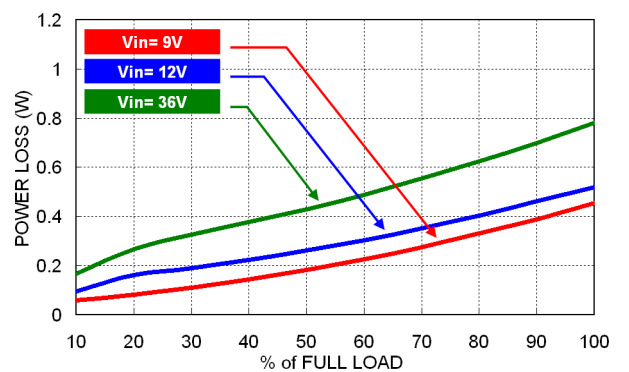


Typical Output Ripple and Noise

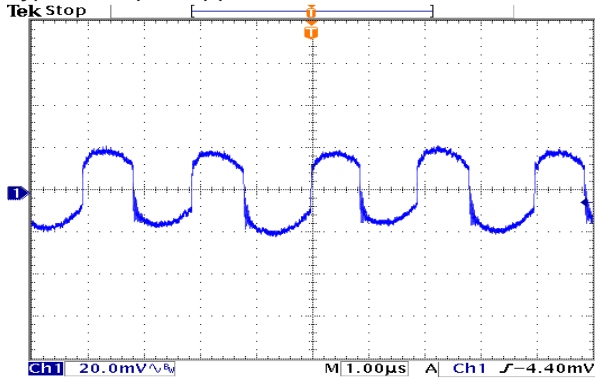

Transient Response to Dynamic Load Change (25%)

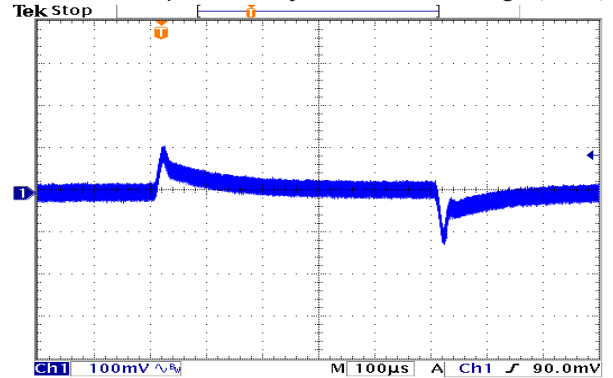


Typical Start-Up and Output Rise Characteristic

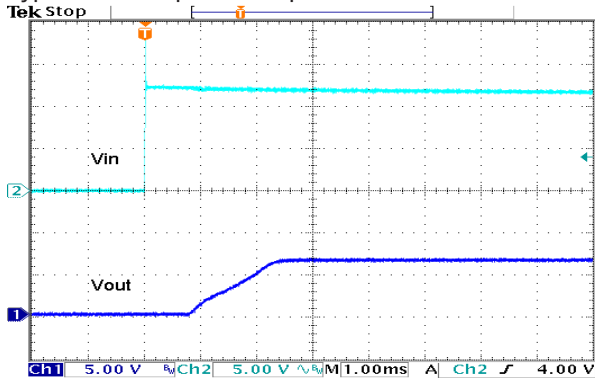


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### TSR1-2490SM


Efficiency versus Output Load

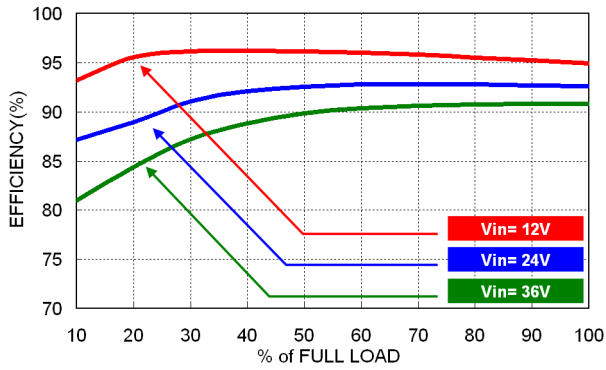


Efficiency versus Input Voltage

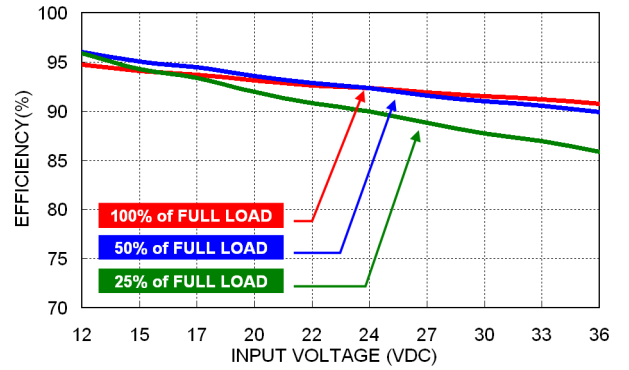


Derating Output Load versus Ambient Temperature

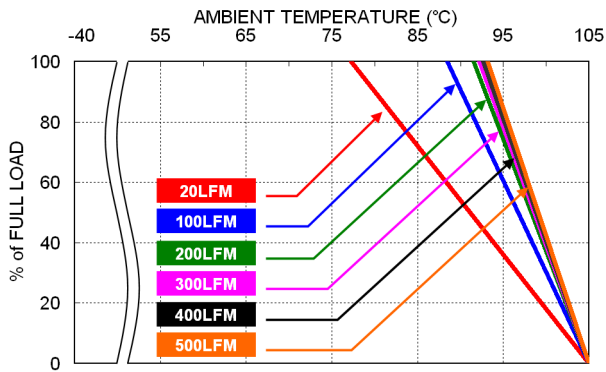


Power Dissipation versus Output Load

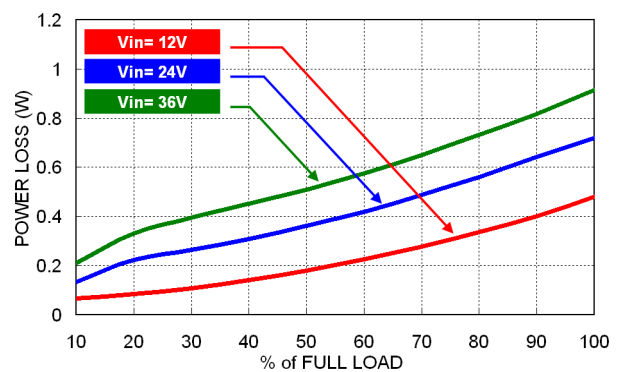


Typical Output Ripple and Noise

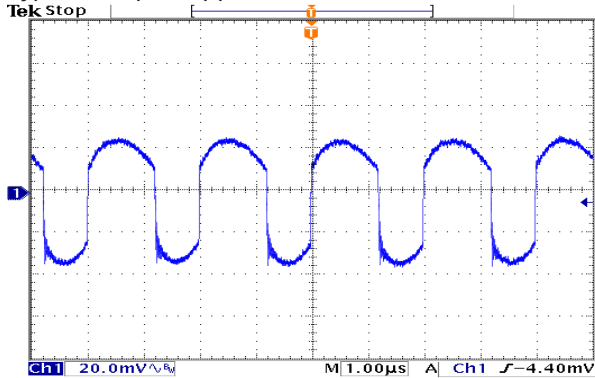

Transient Response to Dynamic Load Change (25%)

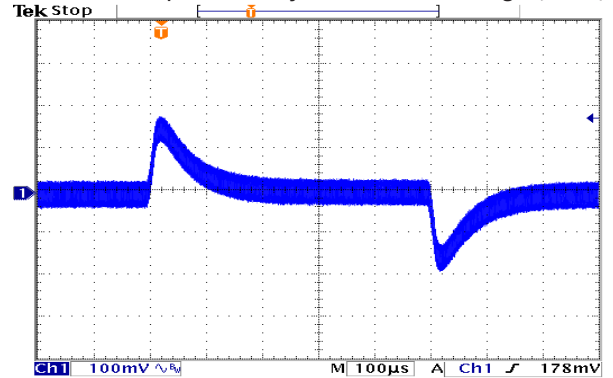


Typical Start-Up and Output Rise Characteristic

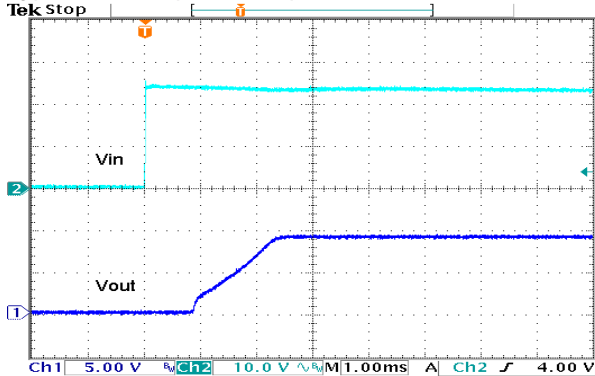


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### TSR1-24120SM


Efficiency versus Output Load

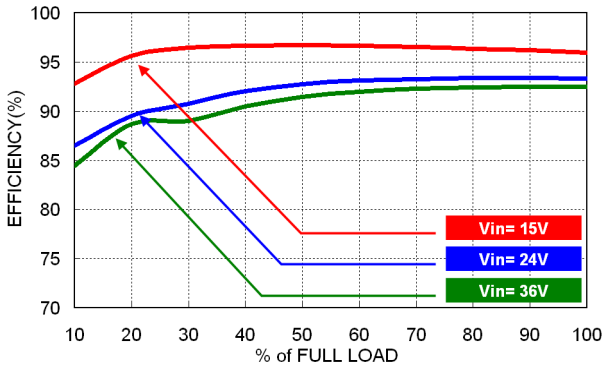


Efficiency versus Input Voltage

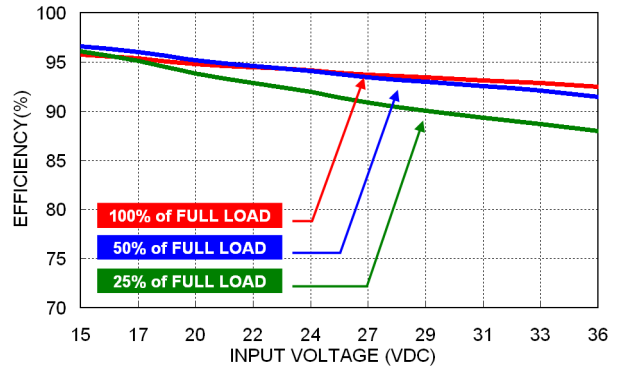


Derating Output Load versus Ambient Temperature

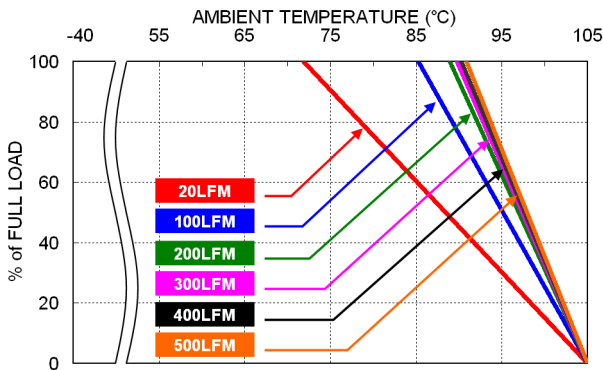


Power Dissipation versus Output Load

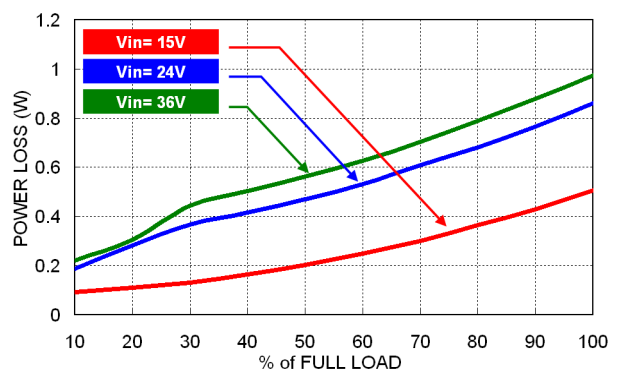


Typical Output Ripple and Noise

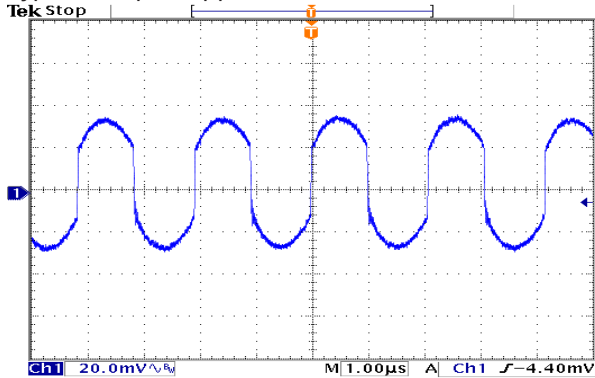

Transient Response to Dynamic Load Change (25%)

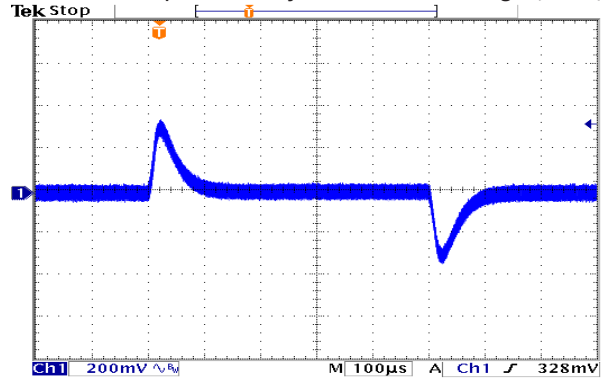


Typical Start-Up and Output Rise Characteristic

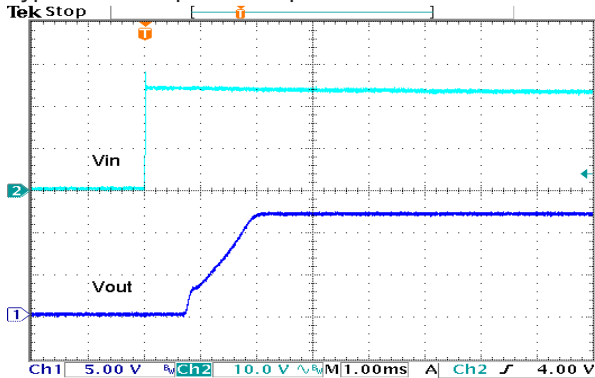


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### TSR1-24150SM


Efficiency versus Output Load

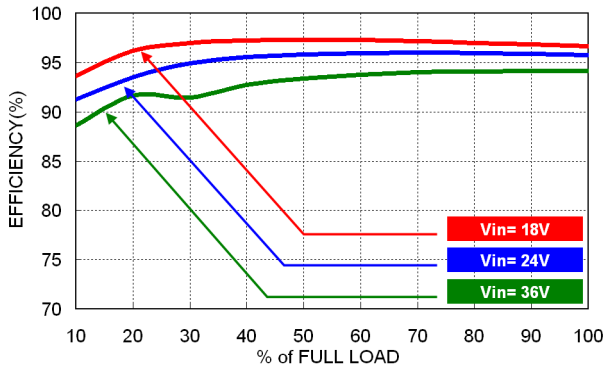


Efficiency versus Input Voltage

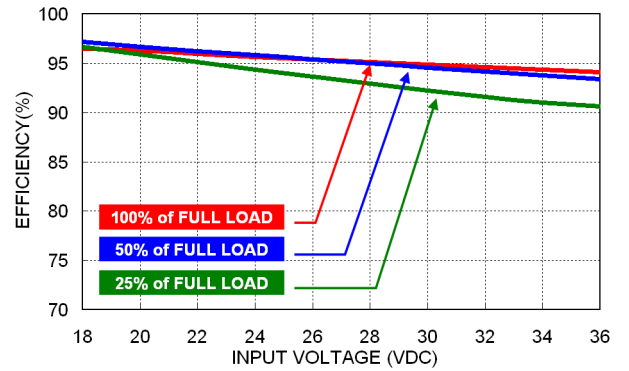


Derating Output Load versus Ambient Temperature

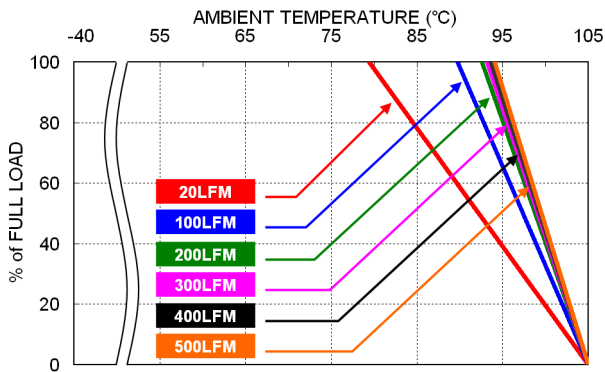


Power Dissipation versus Output Load

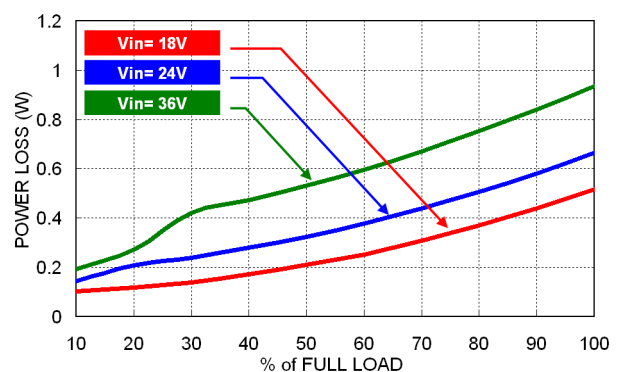

Typical Output Ripple and Noise

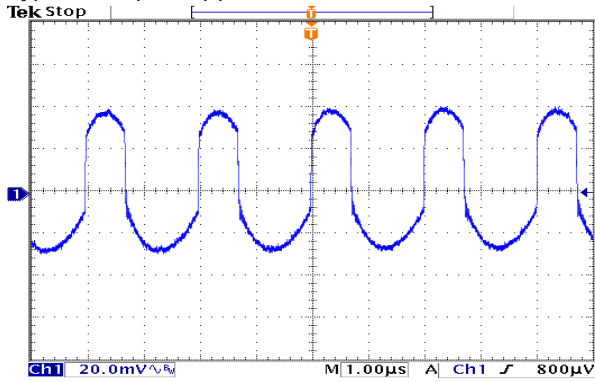

Transient Response to Dynamic Load Change (25%)

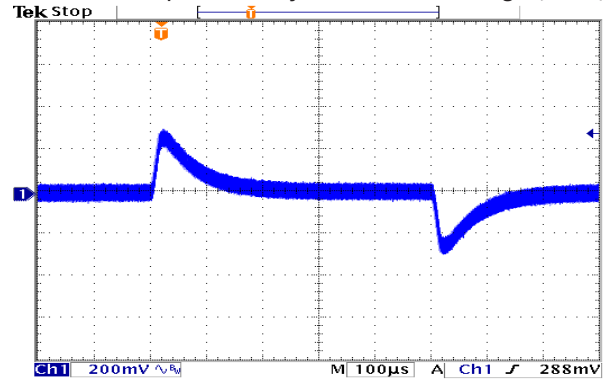

Typical Start-Up and Output Rise Characteristic

